



# MAXAMP 30 STEREO AMPLIFIER CIR

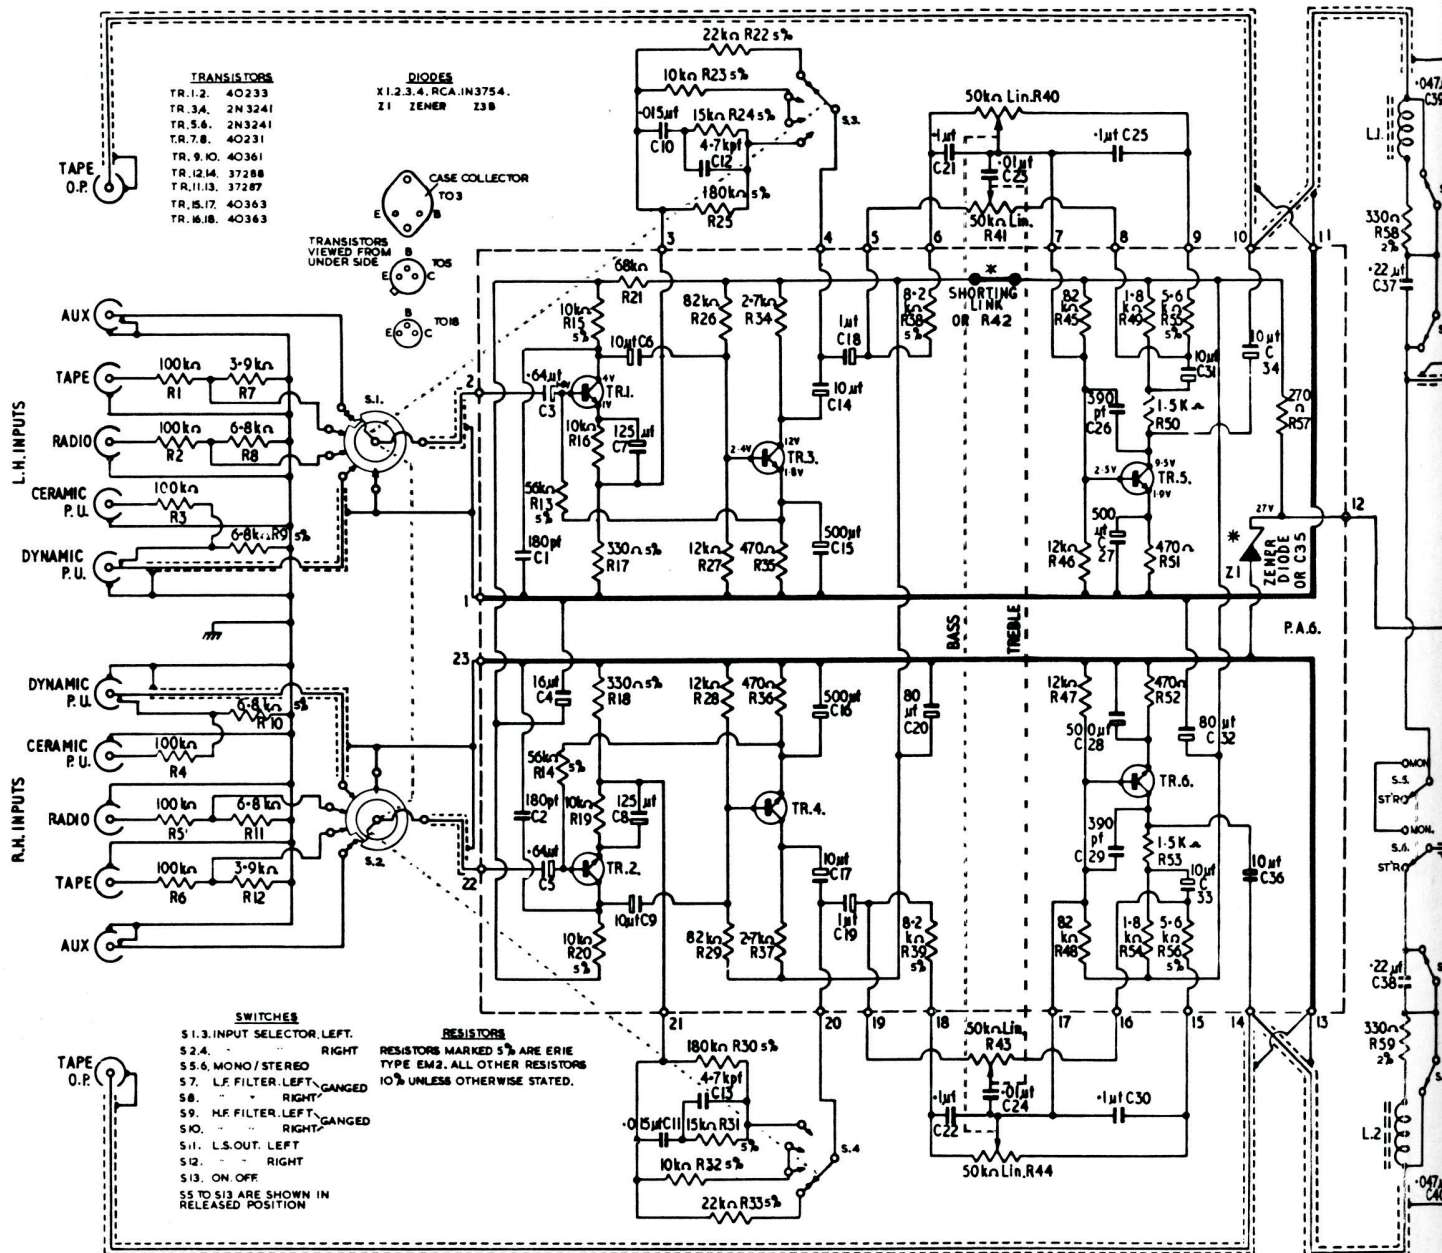

ALL VOLTAGES MEASURED ON AVO MODEL 8 (NOT USING 2.5V RANGE) RESPECT TO CHASSIS AND UNDER NO SIGNAL CONDITIONS.  
 VOLTAGES SHOWN FOR THE LEFT HAND CHANNEL APPLY EQUALLY TO THE RIGHT HAND CHANNEL.

# Circuit Diagram

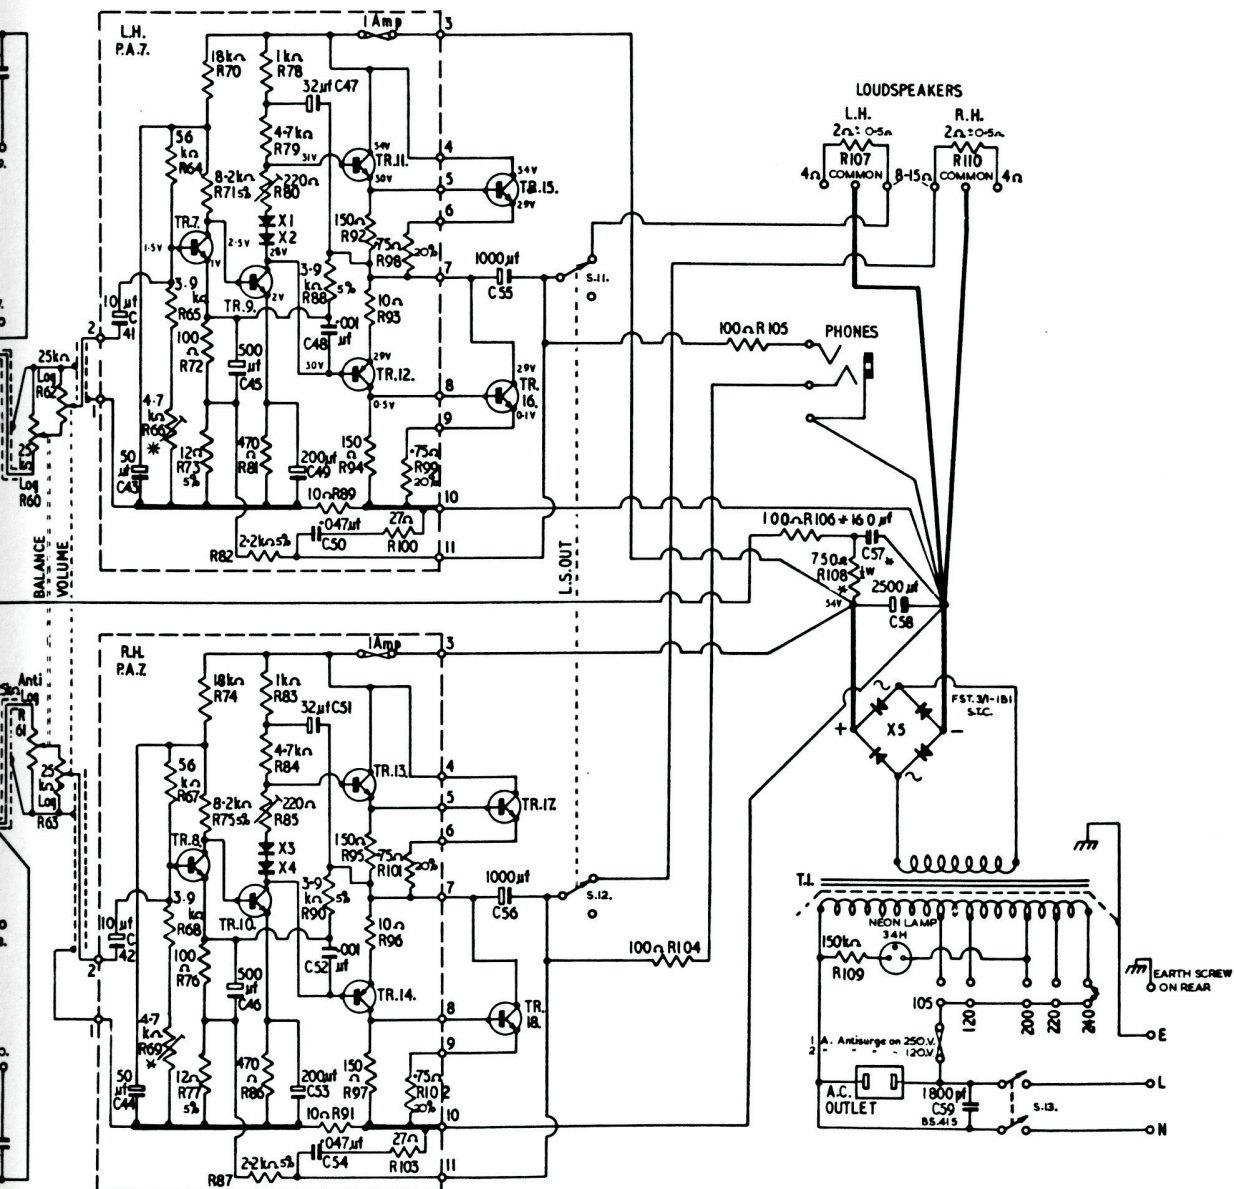

## \* MODIFICATIONS

COMPONENTS MARKED WITH A \* HAVE THE FOLLOWING ALTERNATIVE VALUES OR ALTERATIONS ON SOME EARLY PRODUCTION AMPLIFIERS:-

|      |  |
|------|--|
| R42  | 220 OHM RESISTOR IN PLACE OF SHORTING-LINK   |
| R66  | 22 K   |
| R69  | 22 K   |
| R106 | 560 OHM                                      |
| R108 | 1.2 K  |
| C35  | 32 mfd. CONDENSER IN PLACE OF ZENER DIODE Z1 |
| C57  | 64 mfd.                                      |

(AGE) ARE POSITIVE WITH

LY TO THE RIGHT HAND CHANNEL